


## 3/8" COMPOSITE IMPACT WRENCH | NJ.2000F2

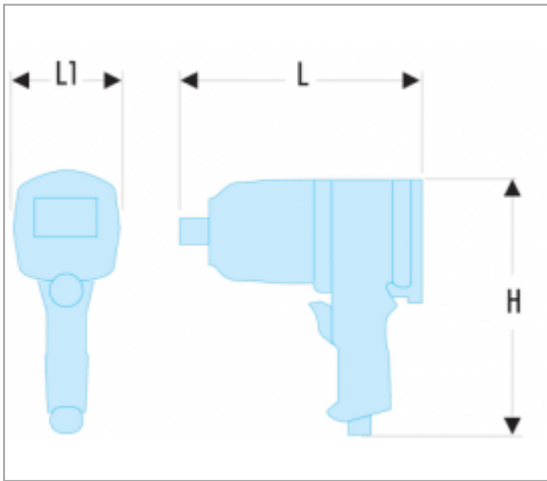

### Description

- Durable twin hammer mechanism encased in a strong aluminium housing.
- Low consumption yet powerful motor delivering 290 N.m of torque.
- Forward / reverse knob with 3 integrated power settings in forward.
- Swivel air inlet to avoid coiling of the hose.
- Durable and insulating composite housing, chemical and acid resistant.
- Feather teasing trigger for optimal speed regulation.
- Socket ring retainer.
- Also available as a 1/2": NS.1500F2.
- Breakaway torque 590 N.m.
- Breakaway torque 475 N.m.
- Blows per minute 1290 cpm.
- Free speed 9600 tr/min.
- Square drive 3/8".
- Working pressure 6,2 bar.
- Average air consumption 120 l/min.
- Air inlet 1/4".
- Minimum hose diameter 10 mm - 3/8".
- Vibration 4,30 m/s<sup>2</sup>/a.
- Vibration 0,92 m/s<sup>2</sup>/K.
- Sound pressure 92,70 dB(A).
- Sound power 103,70 dB(A).

### Information

H [mm]	165
L [mm]	157
L1 [mm]	58
[kg]	1.3