

## FLIR MR77 Pinless Moisture Meter

The FLIR MR77 Moisture Meter performs all the critical and advanced measurements professionals demand. Rugged design with field replaceable sensors are engineered to reduce downtime.

- Field Replaceable Temperature and Relative Humidity Sensor
- Integrated IR Thermometer provides fast non-contact surface temperature measurements
- · Remote pin-type probe (included) allows for contact moisture readings
- Large LCD screen clearly displays moisture, humidity, and air temperature levels
- FLIR Tools Mobile connects the FLIR MR77 to your compatible smartphone and tablet via Bluetooth\*
- METERLINK® technology wirelessly integrates moisture readings on your image with FLIR Thermal Cameras
- All the sensors you need: Integrated pinless moisture sensor, Temperature and Relative Humidity, IR Thermometer and external Moisture Pin Probe


## Features:

Grains Per Pound or Grains Per Kilogram, Dew Point, Condensation Point, Differential Temperature (IR and Dew Point), Material/Wood Groups, High/Low Humidity & Moisture Alarms, Store, Recall, Min/Max, Data Hold, Auto Power Off, Bright White LED Backlight, Low Battery Indication

## Includes:

9V Battery, User Manual/CD, Temperature/RH Sensor, Wired Pin Probe and Limited Lifetime Warranty

| TECHNICAL SUMMARY          | RANGE                            | BASIC ACCURACY |
|----------------------------|----------------------------------|----------------|
| Pinless Moisture           | O to 99.9                        | Relative       |
| Pinless Moisture Depth Max | 0.75in (19mm)                    |                |
| Pin Moisture               | O to 99%WME                      |                |
| Relative Humidity          | O to 99%RH                       | ±2.5%RH        |
| Sensor Temperature         | -18 to 170°F, -28 to 77°C        | ±3.6°F, 2°C    |
| IR Temperature             | -4 to 392°F, -20 to 200°C        | ±3.5%          |
| IR Distance to Spot Ratio  | 8 inches away : 1 inch spot size |                |
| IR Emissivity              | O.95 (fixed)                     |                |
| Vapor Pressure             | O to 20.0kPa                     | ±2%            |

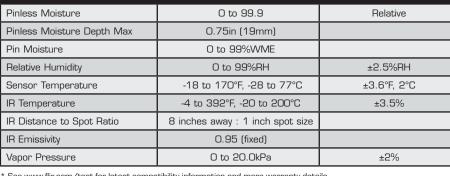

<sup>\*</sup> See www.flir.com/test for latest compatibility information and more warranty details

## Ordering Information

MR77 ...... Pinless Moisture Meter MR77-NIST ...... MR77 with Certificate of Traceability to NIST MRO1 ...... Replaceable Temp/RH Sensor



NASHUA

FLIR Systems, Inc. PH: +1 603-324-7600 PORTLAND Corporate Headquarters FLIR Systems, Inc. PH: +1 866.477.3687

CANADA

FLIR Systems, Ltd. PH: +1 800.613.0507



| GENERAL INFORMATION |                   |  |
|---------------------|-------------------|--|
| Warranty            | Limited Lifetime* |  |
| Bluetooth Range Max | 32ft (10m)        |  |

MEXICO/LATIN AMERICA

Innlanta

FLIR Systems Brasil Av. Antonio Bardella PH: +55 15 3238 8070