



| Description                |                                                          |
|----------------------------|----------------------------------------------------------|
| Impact protection rating   | IK07                                                     |
| Ingress protection rating  | IP54                                                     |
| Operating temperature*     | -30°C - 50°C / 14°F - 122°F<br>0°C - 40°C / 32°F - 104°F |
| Storage temperature        | -20°C - 60°C / -4°F - 140°F                              |
| Lamp module dimensions     | 87 x 65 mm / 3.4 x 2.5"                                  |
| Docking station dimensions | 325 x 132 x 149 mm / 12.8 x 5.2 x 5.8"                   |
| Product weight - 1 module  | 220 g / 0.48 lb.                                         |
| 360° magnet                | rotating                                                 |
| 300° head                  | rotating                                                 |
| 120° lens                  | rotating                                                 |

| Description                |                                                               |
|----------------------------|---------------------------------------------------------------|
| Operating line voltage     | 100-240V<br>Output 12V 1A                                     |
| Power consumption          | Normal mode 1.5W<br>Boost mode 3.7W                           |
| Charging time              | 1 lamp 1 hour<br>2 lamps 1.5 hours<br>3 lamps 2 hours         |
| Battery type               | LiFePO4 3.2V 2C, 1 800 mAh<br>Lifetime: 1 000 charge cycles   |
| Battery performance        | Normal mode - up to 5 hours*<br>Boost mode - up to 2.6 hours* |
| Light intensity (at 0.5 m) | Normal mode 700 lux<br>Boost mode 1 200 lux                   |
| Light intensity (at 0.5 m) | Normal mode 2 100 lux<br>Boost mode 3 600 lux                 |
| Light output (flux)        | Normal mode 120 lm<br>Boost mode 200 lm                       |
| Light output (flux)        | Normal mode 360 lm<br>Boost mode 600 lm                       |

Average hours of burning life, as measured at 25°C and until residual luminous flux amounts to 10% of initial flux.

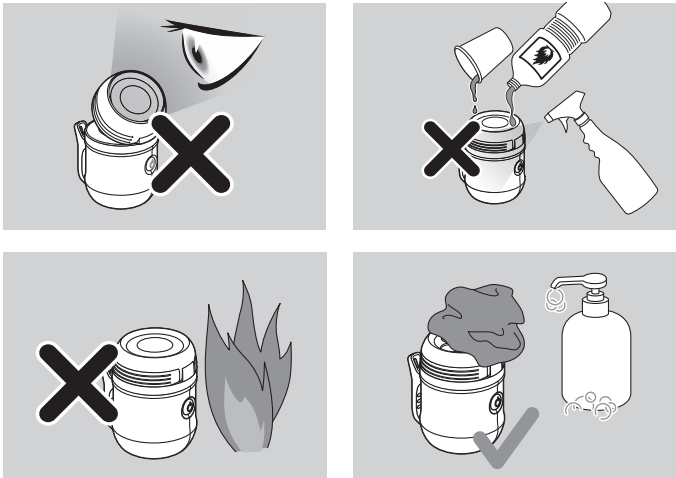

Specifications are subject to change without notice.  
© 2013 Koninklijke Philips Electronics N.V.  
All rights reserved.

Created by HSS-France  
Printed in China 02-2013



## Philips LED Multidirectional lighting system


Register your product and get support at  
[www.philips.com/welcome](http://www.philips.com/welcome)




|           |                                                   |
|-----------|---------------------------------------------------|
| English   | LED inspection lamp with docking station          |
| Dansk     | LED inspektionslampe med opladningsstation        |
| Deutsch   | LED-Inspektionslampe mit Dockingstation           |
| Dutch     | LED-inspectielamp met oplader                     |
| Français  | Lampe baladeuse à LED avec chargeur               |
| Italiano  | Lampada di ispezione a LED                        |
| Norsk     | LED-inspeksjonslampe med koplingsstasjon          |
| Polski    | Lampa inspekcyjna LED ze stacją dokującą          |
| Português | Lâmpada de inspeção LED com carregador            |
| Español   | Lámpara de inspección LED con estación de recarga |
| Suomi     | LED-tarkastuslamppu latausalustan kanssa          |
| Svenska   | Inspektionslampe med LED med laddningsstation     |
| Русский   | Светодиодный инспекционный фонарь                 |

PHILIPS





1 

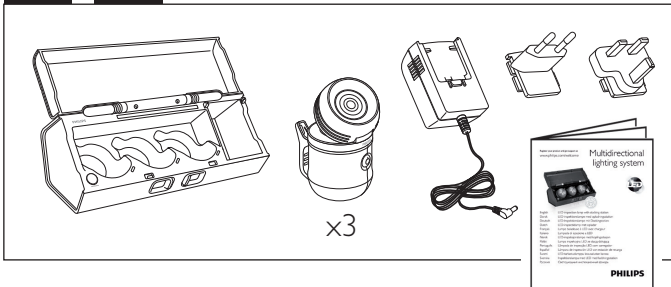


2 

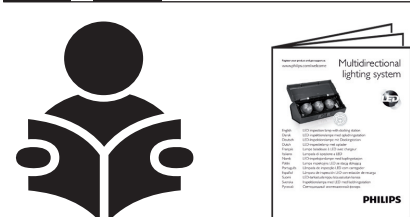




3  






  





  



4 



5  



6  

