

Dual Frequency Sonde

Quick Start Guide




Please ensure you read the user manual before using this product. The quick start guide is NOT a substitute for the User Manual.

NOTE: The thread on the Sonde is a male M10, and comes with adaptors to both British and European drain rods.


33 kHz Mode

- 1 ✓ Unscrew and remove end cap
✓ Insert battery, positive end first
✓ Refit end cap securely
- 2 ✓ Hold Sonde Upright
✓ Confirm green light is continuous
- 3 ✓ Wait approximately 10 seconds for the green light to start flashing
- 4 ✓ With the green light flashing, the Sonde is ready for use at 33kHz

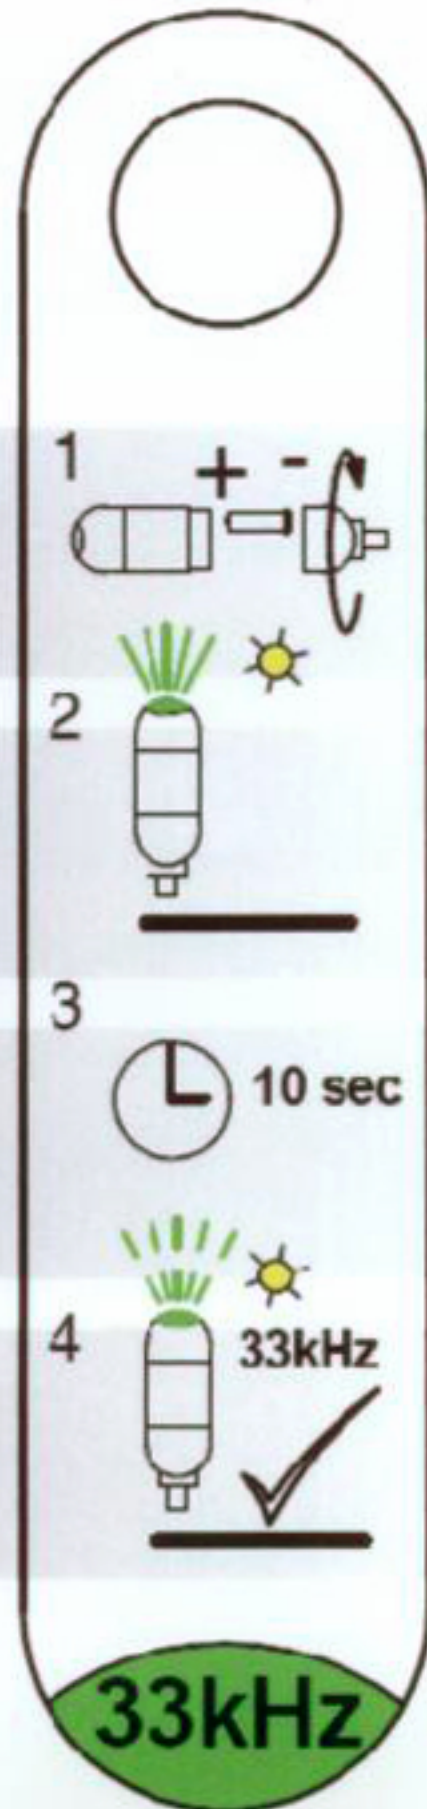

8 kHz Mode

- 1 ✓ Unscrew and remove end cap
✓ Insert battery, positive end first
✓ Refit end cap securely
- 2 ✓ Hold Sonde Upright
✓ Confirm green light is continuous
- 3 ✓ Rotate Sonde so the light points down
✓ Wait approximately 1 second
- 4 ✓ Rotate Sonde upright
✓ Confirm orange coloured light is continuous. (If light remains green repeat from step 1)
- 5 ✓ Wait approximately 10 seconds for the orange light to start flashing
- 6 ✓ With the orange light flashing, the Sonde is ready for use at 8kHz

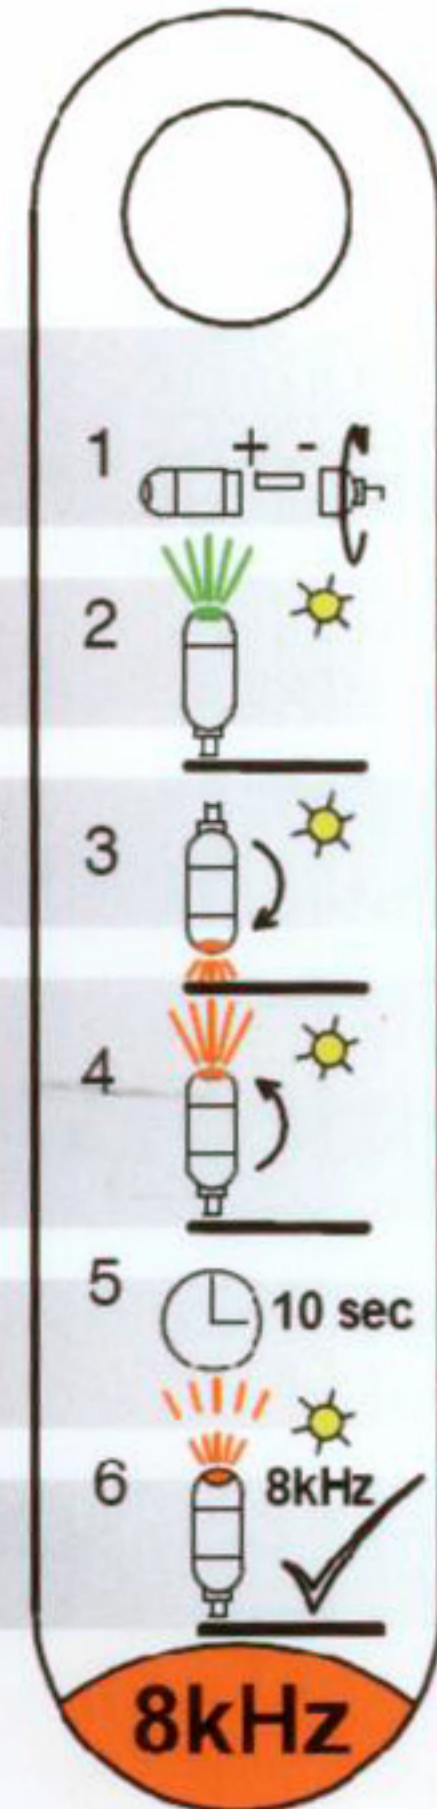

NOTE: Once the function of the Sonde has been checked with a locator set to the same operating mode it can be attached to drain rods or other means of guiding it into the service being traced.