

# Junistar Soft

**IP54**
**SELV**
**IsoSafe@180mA**

220-240V, 50/60Hz, 11W

|   |  |
|---|--|
| <p>255mA, 36V</p>   | <p>L x W x H<br/>102 x 51 x 22 mm</p>  |
| <p>✓ 180 - 255mA</p> <p>10-40mm</p> <p>SG Multibox SG Multibox Mini SG Sealbox<br/>SG Multibox TEK SG Concretebox SG Ledbox 48</p>                | <p>Ø 3-7mm Ø &gt;7mm-Ø11mm</p> <p>0,5 - 1,0 mm<sup>2</sup> 8 mm<br/>1,5 - 2,5 mm<sup>2</sup> 12 mm</p> <p>ca. 10° (max. 20°)<br/>Max. 16A</p>  |
| <p>✓ 180 - 255mA</p> <p>Min. 45 mm<br/>Min. 55 mm 5-40mm</p> <p>Volume: Min. 4 L (4000 cm<sup>3</sup>)<br/>(E.g. 300mm x 300mm x 48mm = 4,3L)</p> | <p>IP54 IP54<br/>IP54 IP54</p>   |
| <p>⚠ 180mA only</p> <p>100 mm</p>   | <p>⚠</p> <p><b>NO:</b> Kan kun installeres av en registrert installasjonsvirksomhet.<br/><b>EN:</b> Only to be installed by an authorized electrician.<br/><b>FR:</b> Doit être installé par un électricien autorisé.<br/><b>NL:</b> Mag alleen geïnstalleerd worden door een bevoegde elektricien.<br/><b>DE:</b> Dieses Produkt darf nur durch autorisiertes Personal (z. B. Elektro-Installateur) angeschlossen und in Betrieb genommen werden.<br/><b>FI:</b> Asentaa saa vain valtuutettu sähköasentaja</p> <p><b>NO:</b> Skru av strømmen før montering.<br/><b>EN:</b> Turn off power before installing.<br/><b>FR:</b> Couper le courant avant l'installation.<br/><b>NL:</b> Stroom uitschakelen voor u het toestel installeert.<br/><b>DE:</b> Vor Installationsarbeiten den Strom abschalten.<br/><b>FI:</b> Sammuta virta ennen kytkemistä</p> <p><b>NO:</b> Minimumsavstand til brennbart materiale i armaturens stråleretning.<br/><b>EN:</b> Minimum distance to flammable material in the beam direction.<br/><b>FR:</b> Distance minimum entre le faisceau lumineux de l'armature et toute matière inflammable.<br/><b>NL:</b> Minimale afstand tussen de lichtstraal van de armatuur en het brandbaar materiaal.<br/><b>DE:</b> Der kleinste Abstand zum brennbaren Material in die Richtung des Lichtstrahls.</p> |

**NORWAY**  
SG Armaturen AS

Skytterheia 25  
N-4790 Lillesand

Tel: +47 37 50 03 00  
firmapost@sg-as.no  
www.sg-as.no

**SWEDEN**  
SG Armaturen AB  
Tel: +46 31 81 71 10  
info@sg-ab.se  
www.sg-ab.se

**FINLAND**  
SG Armaturen Oy  
info@sg-oy.fi  
www.sg-oy.fi

**DENMARK**  
SG Armaturen A/S  
Tel: +45 70 70 72 13  
info@sg-as.dk  
www.sg-as.dk

**UNITED KINGDOM**  
SG Lighting LTD  
Tel: +47 37 50 03 00  
info@sighting.co.uk  
www.sighting.co.uk


**FRANCE**  
SG Lighting SA/NV  
Tel: +33(0) 4 94 93 00 00  
info.france@sighting.fr  
www.sighting.net

**BENELUX**  
SG Lighting SA/NV  
Tel: +32(0) 15 20 72 71  
info.benelux@sighting.net  
www.sighting.net

**GERMANY**  
SG Leuchten GmbH  
Tel: +49 40 23 99 44 59  
info@sg-leuchten.de  
www.sg-leuchten.de

**INTERNATIONAL**  
SG Lighting Co Ltd.  
Tel: +86 769 88 49 20 88  
cindy@sightcn.com  
www.sg-as.com

# Dipswitch

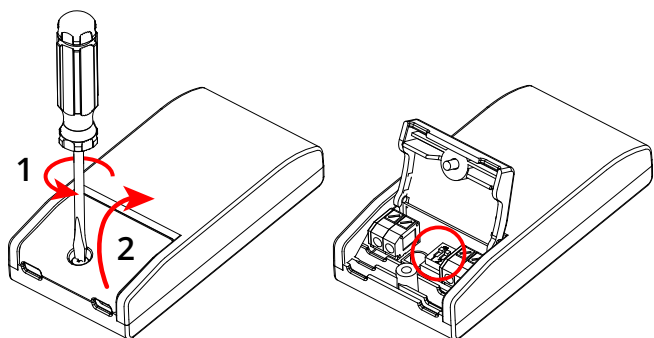

IsoSafe



Standard



|           |     |     |     |             |
|-----------|-----|-----|-----|-------------|
| <b>mA</b> | 180 | 205 | 230 | <b>255</b>  |
| <b>lm</b> | 71% | 80% | 90% | <b>100%</b> |