







Frame Round

Frame Round Maxi



☐ ⚡ **CE IP65 IK10**

230V, 50/60Hz (Sensor 50Hz)

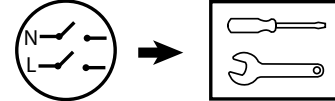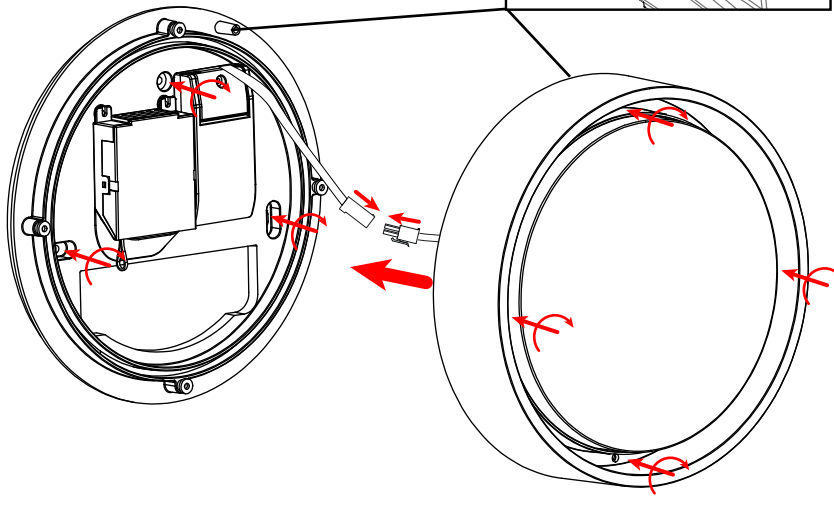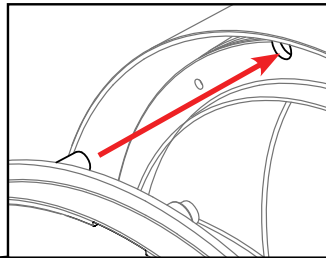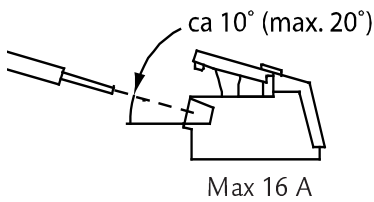


NO: Skru av strømmen før montering
 EN: Turn off power before installing
 FR: Couper le courant avant l'installation
 NL: Stroom uitschakelen voor u het toestel installeert
 DE: Vor Installationsarbeiten den Strom abschalten.
 FI: Sammuta virta ennen kytkemistä.




NO: Kan kun installeres av en registrert installasjonsvirksomhet
 EN: Only to be installed by an authorized electrician

FR: Doit être installé par un électricien autorisé
 NL: Mag alleen geïnstalleerd worden door een bevoegde electricien
 DE: Dieses Produkt darf nur durch autorisiertes Personal (z. B. Elektro-Installateur) angeschlossen und in Betrieb genommen werden.
 FI: Asentaa saa vain valtuutettu sähköasentaja.

Frame Round

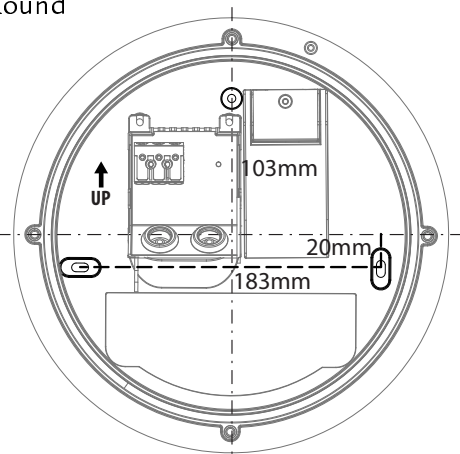

Frame Round Maxi

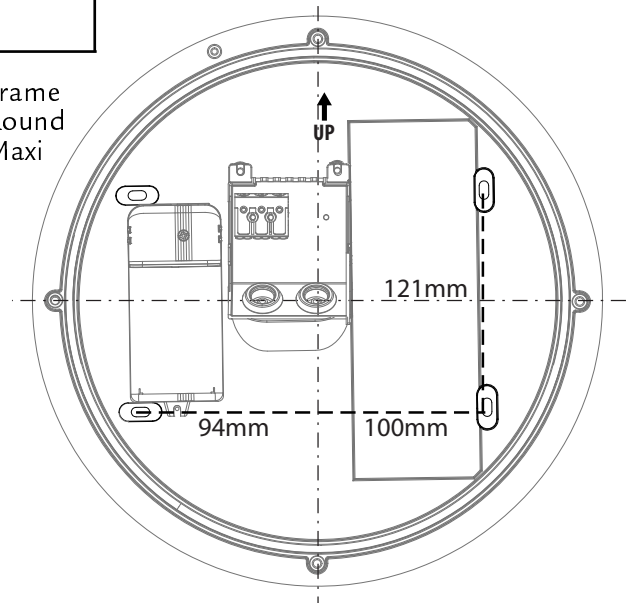

CORPORATE OFFICE:
SG Armaturen AS
 Skytterheia 25
 4790 Lillesand
 NORGE

Tlf:+47 37 50 03 00
 firmapost@sg-as.no
 www.sg-as.no

BRANCH OFFICE:
 SG Lighting SA/NV
 Blokhuisstraat 47
 2800 Mechelen Noord I
 BELGIQUE/BELGIË

Tlf:+32(0) 15 20 72 71
 info.benelux@silighting.net
 www.silighting.net

BRANCH OFFICE:
 SG Armaturen A/S
 Egebakken 19
 7400 Herning
 DANMARK

Tlf:+45 70 70 72 13
 info@sg-as.dk
 www.sg-as.dk

BRANCH OFFICE:
 SG Lighting SA/NV
 73 rue de Saint Mandrier
 83140 Six Fours Les Plages
 FRANCE

Tlf:+33(0) 4 94 93 00 00
 info.france@silighting.fr
 www.silighting.net


BRANCH OFFICE:
 SG Leuchten GmbH
 Postfach 67 04 21
 22344 Hamburg
 GERMANY

Tlf:+49 40 23 99 44 59
 info@sg-leuchten.de
 www.sg-leuchten.de

BRANCH OFFICE:
 SG Armaturen AB
 August Barksg. 30B
 421 32 Västra Frölunda
 SVERIGE

Tlf:+46 31 81 71 10
 info@sg-ab.se
 www.sg-ab.se

Frame
Round

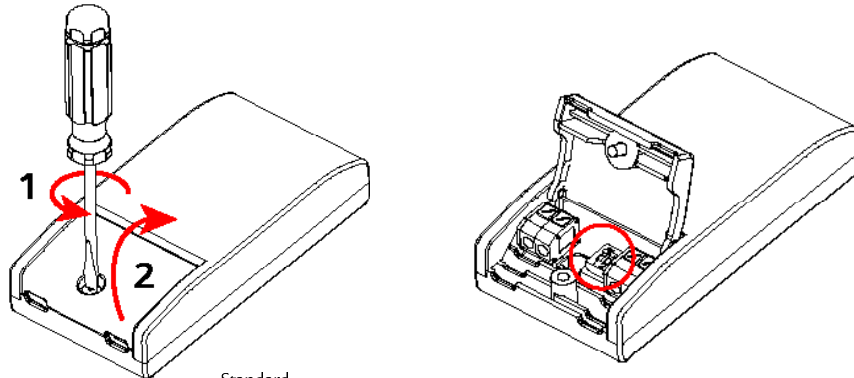


Standard



mA	180	205	230	255
W	7,2	8,2	9,3	10,3
lm	100%	114%	130%	140%

Frame
Round
Maxi

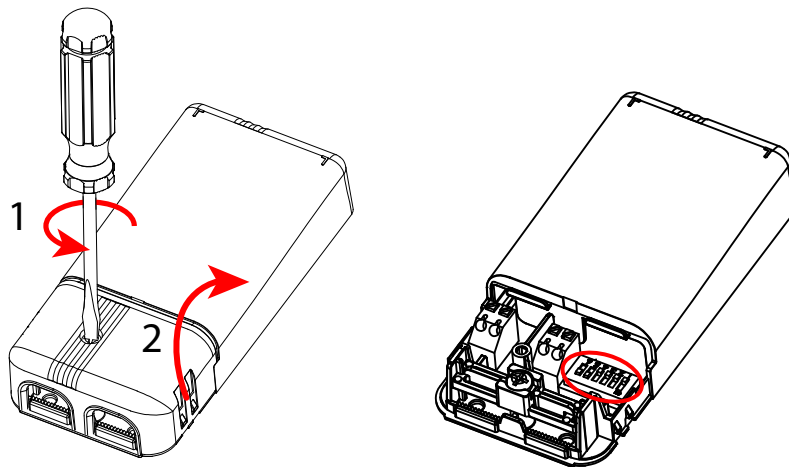

mA	250	300	350	400	450	500
W	8	10	11,5	13	15	16
lm	36%	43%	50%	57%	64%	71%

Standard



mA	550	600	650	700	750-900	12/24/28V
W	18	20	21	23	!	°C
lm	79%	86%	92%	100%	!	!