



DESIGNLIGHT

SCANDINAVIAN AB

LED-PANEL, FRAMY

E-NR: 70 267 82

ART NR: LPF-60X60B3K

| EFFEKT POWER | KELVIN KELVIN | ARMATURFÄRG LUMINAIRE COLOUR | LUMEN (LM) LUMEN (LM) |
|--------------------------|------------------|---------------------------------|--|
| 30W 32W 34W 36W | 3000K | SVART/BLACK RAL9011 | 2800LM (750MA) 3000LM (800MA) 3200LM (850MA) 3400LM (900MA) |

CE, RoHS  



 **LIFETIME**
L70B50: 180.000H
L80B50: 113.000H

LIFETIME DRIVER
70.000H




- VALBAR EFFEKT
- DRIVDONET KOMPLETT MED 2 M SLADDSTÄLL
- EFFEKTFULL BELYSNING SOM SYNS!
MODERNT OCH STILFULLT


- LÄTTMONTERAD



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

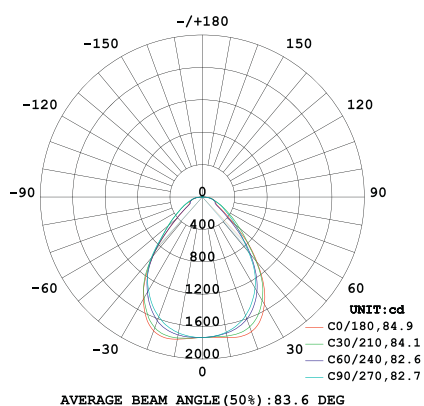

LPF-60X60MW3K

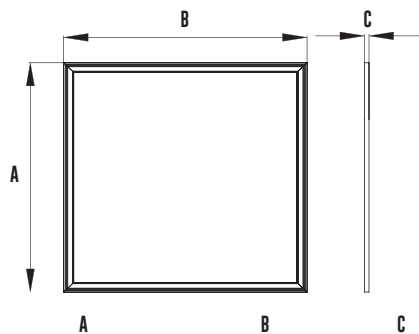

MÅTT MM

| 595 | | 595 | | | |
|---------|---------|---------|---------|---------|--|
| MIN. MM | MAX. MM | MIN. MM | MAX. MM | MIN. MM | |
| 594 | 596 | 594 | 596 | 14 | |



PRODUKTEN INNEHÅLLER LJUSKÄLLA MED ENERGI MÄRKNING KLASS F.

SÄKERHET:

- 1 Läs igenom hela manualen noggrant före installation.
- 2 Försäkra dig om att spänningen är fränslagen före installation eller underhåll.

SAFETY:

- 1 Read the entire manual carefully before installation.
- 2 Make sure that the voltage is switched off before installation or maintenance.

| | | | | | | |
|-----------------------|-----------------------|-------------------------------|-----------------------|----------------------------|-----------------------|------------------------|
| 1.900K | 2.700-3.000K | 4.000-4.500K | 4.800K | 5.000-5.000K | 7.000-7.500K | 10.000K |
| STEARINLJUS CANDLE | VARMVIT WARM WHITE | NATURLIG VIT NATURAL WHITE | SOLLJUS DIRECT SUN | VITT DAGSLJUS DAY WHITE | KALLVIT COOL WHITE | BLÅ HIMMEL BLUE SKY |

DESIGNLIGHT
SCANDINAVIAN AB

DESIGNLIGHT SCANDINAVIAN AB · TOFFELVÄGEN 1 · 342 60 MOHEDA

KUNDCENTER: TELEFON 0472-716 10 · FAX 0472-716 09 · INFO@DESIGNLIGHT.NU · WWW.DESIGNLIGHT.NU